

# SOKKIA

MADE TO FIT YOUR WORLD.

## GRX3

GNSS Receiver



### Positioning made easy

This fully integrated all-in-view constellation RTK GNSS receiver brings a new level of versatility and flexibility into your precision positioning applications. The GRX3 provides unmatched usability and versatility that's sure to enhance your productivity.

And like all Sokkia products, you can customize it to meet your needs and create your own workflows.

- Sokkia Tilt Technology
- L Band Ready Technology
- 226 Universal Tracking Channels™ covering all modernized signals (GPS, GLONASS, Galileo, BeiDou, IRNSS, QZSS, SBAS)
- Integrated 400MHz UHF and SiteComm™ Radios
- RTK and static survey operations
- Fusion Positioning™ technology automated workflow
- Standard RTK and Network RTK
- IP67 rated



### Sokkia Tilt Technology

The Sokkia GRX3 incorporates a revolutionary 9-axis inertial measurement unit (IMU) and an ultra-compact 3-axis eCompass. This advanced technology compensates for mis-leveled field measurements out of plumb by as much as 15 degrees. Awkward shots on steep slopes or hard to reach spots are now a breeze with tilt technology.

### Open Architecture

The GRX3 architecture is designed so that third parties can write their own applications.

### All Constellation Support

Featuring 226 Universal Tracking Channels with Universal Tracking Technology, the GRX3 has you covered. With programmable channels for tracking available signals, the GRX3 supports all modernized signals.

## Multiple Wireless Technologies

The most commonly used wireless technologies can be integrated into the GRX3 receiver. Digital UHF, Network RTK and SiteComm™.

## Maximum Versatility

Utilizing full wireless connectivity and no voice feedback, the GRX3 enables the use of both RTK and network RTK technologies. It can be operated as both a private RTK base and RTK rover using the internal digital UHF.

## Stay in Control

The GRX3 includes built-in internal Bluetooth® capability that allows you to choose your field controller model and software. Whether it is a small palm-sized screen device, a larger screen handheld, or even a field laptop, the GRX3 is ready to connect.

## Ready for the field

The GRX3's magnesium alloy body can handle even the toughest job site conditions. It's compact, watertight, and rugged with IP67 rated dust and water protection.



## Specifications

GNSS Tracking	
Channel Count	226 with patented Universal Tracking Channels technology.
Signal	
GPS Signals	L1 C/A, L1C <sup>†</sup> L2C, L2P(Y), L5 <sup>‡</sup> L1C when signal available.
GLONASS	L1 C/A, L1P, L2C/A, L2P, L3C <sup>†</sup> L3C when signal available.
Galileo	E1/E5a/E5b/Alt-BOC
BeiDou/BDS	B1, B2
IRNSS	L5
SBAS	WAAS, EGNOS, MSAS, GAGAN (L1/L5 <sup>‡</sup> ) <sup>‡</sup> L5 when signal available.
L-band	TopNET Global D & C Corrections services
QZSS	L1 C/A, L1C, L1-SAIF, L2C, L5
User Interface	
Operation	Single-button operation for power, receiver reset, memory initialization
Display panel	LED status indicators
Positioning Performance	
Static/ Fast Static	H: 3 mm + 0.4 ppm V: 5 mm + 0.5 ppm*
RTK	H: 5 mm + 0.5 ppm V: 10 mm + 0.8 ppm
RTK, Tilt Compensated	H: 1.3 mm/°Tilt; Tilt ≤ 10° H: 1.8 mm/°Tilt; Tilt > 10° Maximum recommended angle for tilt compensation is 15°. **
DGPS	0.25 m HRMS
L-Band, D Corrections Service	H: < 0.1 m (95%) V: < 0.2 m (95%)
Operational Time	RX mode - 10hr TX mode 1W - 6hr <i>Use of external 12V battery is recommended when using GRX3 with internal radio in transmit mode.</i>
Internal Radios	425-470 MHz UHF radio Max Transmit Power: 1W Range: 5-7 km typical; 15 km in optimal conditions.***
Memory	Internal Non-removable 8 GB SDHC
Environmental	
Dust/Water Rating	IP67
Operating Temperature	-40°C to 70°C
Humidity	100%, condensing
Drop and Topple	1.0 m drop to concrete. 2.0 m pole drop to concrete.
Physical	
Dimensions	150 x 100 x 150 mm (w x h x d)
Weight	<1.15 kg

\* Under nominal observing conditions and strict processing methods, including use of dual frequency GPS, precise ephemerides, calm ionospheric conditions, approved antenna calibration, unobstructed visibility above 10 degrees and an observation duration of at least 3 hours (dependent on baseline length).

\*\* Subject to successful Tilt calibration and operating environment free of magnetic disturbances.

\*\*\*Varies with terrain and operating conditions.

## Software

MAGNET software is tailored for use with Sokkia GNSS receivers in both field and office functions.


### MAGNET Enterprise

A managers dream of tracking all field and office data in one simple to access web interface. Store and exchange your field data in the Enterprise cloud. Save time by sending your field and office updates to the cloud rather than driving back to the office.



### MAGNET Office

Get full CAD functionality with MAGNET Office Site and Survey with direct export to Bentley® i-model or Autodesk® AutoCAD® and Civil3D® software or process field data with MAGNET Office Tools inside AutoCAD® products, like Civil3D®. Choose the MAGNET Office solution module that best fits your needs.

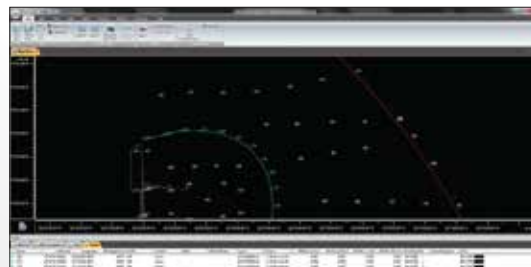

- Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sokkia is under license. Other trademarks and trade names are those of their respective owners.
- Designs and specifications are subject to change without notice.
- Product colors in this brochure may vary slightly from those of the actual products owing to limitations of the printing process.

Your local Authorized Dealer is:

# SOKKIA

Topcon Positioning Middle East and Africa FZE  
P.O.Box 371023, LUJ-11, Dubai Airport Free Zone, Dubai, UAE  
Phone: (+971)4-2990203 Fax: (+971)4-2990403  
Email: marketing@topconqulf.com  
Website: www.topconpositioningmea.com

Specifications subject to change without notice  
©2018 Topcon Corporation All rights reserved.

TPMA-5068.ME.0119.E2